

Lamello

Top 20S

The **new** Top 20S Soft Start Version in stock NOW




Secure On-line Ordering for U.S. Only

Free shipping does not apply to destinations outside the U.S.

No order is processed until final checkout.

Lamello Top 20S - No. 101050S - \$749.00

including **FREE** UPS Ground Shipping



Discover the brand-new grooving machine with the unique Step Memory System.

We have made a dream come true. The Lamello Top 20S is a grooving machine with height adjustable cutting tool. Scale +/- 2 mm. in steps of 0.1 mm. for exact positioning of the groove. Each position is reproducible any time! Imagine what you can do with it!



Lamello Top 20S -



perfect in every way



- **Multipurpose stop square** - Equipped with dove-tail guidance and with grids of 1 mm. for absolutely parallel attachment on front plate or fixed to base plate for a large and safe working surface when using the machine in vertical position.
- **Swiveling front stop** - with scale in degrees for mitre joining between 0 and 90, stops automatically at angles 22.5, 45 and 67.5 degrees.
- **Depth adjuster** - for 6 cutting depths, preadjusted for Lamello biscuits (size 20, 10 and 0), Lamello Simplex (detachable aluminum fittings), Lamello Duplex (furniture hinge) and the maximum cutting depth.
- **Extra flat anti-slip pads** - guarantee optimum adhesion against lateral displacement.
- **Quick change of cutter** - thanks to central locking system.



Technical Data	
Power	500 W
Speed	10,000 RPM
Cutter	100 x 4 x 22 mm.
Teeth	Z=6 (2+2+2) with scoring
Cutting Depth Max.	20 mm.
Weight of Machine	3.3 kg.

Additional uses:

Patching resin pockets
 Cutting shadow joints
 Inserting fittings (Duplex)
 Edge trimming (Nova)



Lamello *Classic C2*

The low-priced machine for every workshop.



Secure On-line Ordering for U.S. Only

Free shipping does not apply to destinations outside the U.S.

No order is processed until final checkout.

Lamello Classic C2 - No. 101250 - \$399.00
including **FREE** UPS Ground Shipping



Lamello Classic C2

- Motor 705 W
- Swiveling front with notches at angles 22.5, 45 and 67.5 degrees
- Quick adjustment for 6 cutting depths
- Nickel coated guide plate
- Groove cutter with 6 alternating teeth
- Height adjustable stop square
- Anti-slip pads
- Central locking for quick change of cutter
- Plastic carrying case.

Technical Data

Power	705 W
Speed	10,000 RPM
Cutter	100 x 4 x 22 mm.
Teeth	Z=6 (3+3)
Cutting Depth Max.	20 mm.
Weight of Machine	3.1 kg.

Additional uses:


- Patching resin pockets
- Cutting shadow joints
- Inserting fittings (Duplex)
- Edge trimming (Nova)

Get your hands on the Speed, Power and Accuracy of a Lamello!

Lamello

Beechwood Plates/Biscuits

Standard and Special Sizes

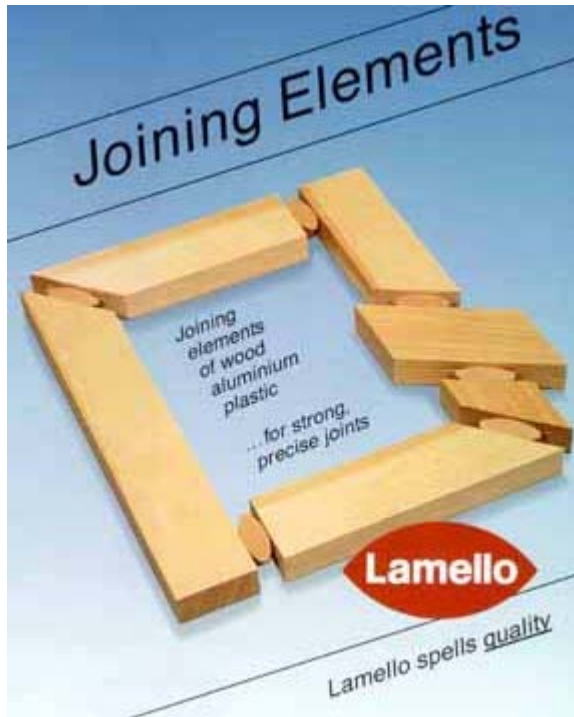

From Lamello's own harvested Beechwood comes the finest milled plate joinery biscuits available today. With Lamello biscuits you will never experience variations in thickness, variations in species of woods, splintering, or hydrolyzing effects. Lamello biscuits offer you 100% control from tree to computer plate compression and drying.

As the U.S. agents for Steiner Lamello AG Switzerland, Colonial Saw Company, Inc. feels confident that genuine Lamello biscuits are unmatched by any other producer.

What to look for:

- Gridded surface for uniform glue spreading
- Cross ribs for easy insertion
- Flat ends so surplus glue remains inside the groove
- True to size in length and thickness.
- No dust or fiber shed
- High breaking strength and finely ground edges
- Clearly embossed brand name "LAMELLO"

Moisture content:

- Nine percent (9%) with a tolerance plus or minus (+ or-) of one percent (1%).

Thickness tolerance:

- 4 MM plus 0. tolerance can be minus 1/10 MM or 0.004 of one inch.

Lamello

Glue Application Systems

LK-3



LK-5



LK-10



The Professional glue application system

- **Eliminate the mess and hassle of glue pots, bottles and brushes forever.**
- **Ready for use anywhere, any time.**
- **Pressurized tank allows unrestricted mobility**
- **Minimal cleaning required**
- **Application areas:** Edges, surfaces, Lamello plate and dowel joining, dovetail, mortise and tenon joining, continuous grooves, etc.

Technical Data	LK-3	LK-5	LK-10
Contents	3 kg.	5 kg.	10 kg.
Weight	4.9 kg.	9.7 kg.	16.4 kg.


Equipment:

Glue applicator made from stainless steel, non-drip glue pistol, manometer, 4 m. hose with plastic container used as interior tank, water container for easy cleaning of the pistol, all-purpose pointed nozzle, pump hose. Operating pressure between 5 and 2 bar.


Accessory:

Mobile base: ideal for carpet floor workers

Service-friendly glue pistol LK-0, quick change of nozzle thanks to the bayonet locking, glue quantity continuously adjustable at metering nut.

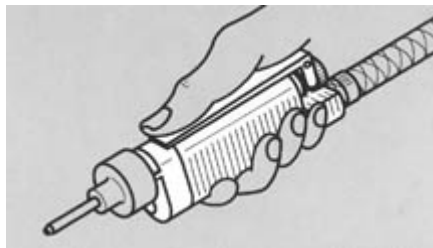

A wide range of standard nozzles available from stock:

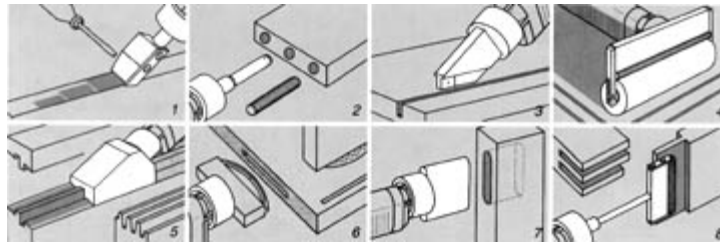

1. Adjustable nozzle
2. Dowel nozzle
3. U nozzle
4. Surface roller
5. Profile-edge nozzle
6. Lamello nozzle
7. Slot nozzle
8. Roller nozzle

Special Service: Custom nozzles manufactured to requirements.

Get your hands on the Speed, Power and Accuracy of a Lamello!

QUICK JUMP:

POWERMATIC**Powermatic Model 66 Tablesaw**

- Precision cast iron table is ground and polished to a fine mirror finish
- The left tilting blade prevents the binding of stock between the blade and fence which substantially reduces the possibility of kickback
- The left tilting blade also aids in making clean mitre cuts as the tear-out will be on the bottom side of the work piece
- The wide stanced, heavy-duty one piece trunnion has a "C" Flange mount which relieves the weight at the saw arm pivot shaft and promotes easier raising and tilting of the saw blade
- T-slot for standard mitre gauge
- Exclusive 3VX belt drive distributes torque more efficiently and generates less heat while operating virtually vibration-free
- All units have magnetic controls
- Accu-Fence System ensures accuracy and is available with 30" or 50" to the right cutting capacity
- The built-in dust collection port and convenient access to the inside of the saw cabinet make for simple clean-up
- Models with the Rout-R-Lift System are available
- A cabinet and Rout-R-Lift System is also available as an optional accessory

STANDARD EQUIPMENT

- Motor with magnetic controls
- Accu-Fence
- 4" dust collection port
- Standard left and right cast iron extension wings, 8" each (unless otherwise specified)
- Blade guard and splitter (with anti-kickback paws)
- Arbor wrench
- Motor pulley
- Mitre gauge
- Enclosed stand
- Blade, power cord and motor cover not included

Optional Accessories

- 2028085 Attachment, scoring
- 2042335 Mobile base, for models with closed stand, 50" Accu-Fence and table (28" x 355/8")
- 2042336 Mobile base, for models without tables
- 2042342 Mobile base, for models with open stand, w/ 50" Accu-Fence and table (28" x 355/8")
- 2042372 Mobile base, for models with 30" Accu-Fence and Rout-R-Lift
- 2195042 Accu-Fence, 50"
- 2195047 Accu-Fence assembly only
- 2195049 Accu-Fence System, for models with sliding table



Shown Above: Model 66 with 30" Fence



Shown Above: Model 66 with Router Cabinet

Powermatic, JET, and Performax products are sold ONLY through distributors. Please see our [Dealer Search](#) for a location near you.

View Other Versions:

[Model 66 With XCaliber Fence](#)

[Model 66 Left Tilt With Mobile](#)

[Base](#)

[Model 66 With Cast Iron Fence &](#)

[Extension Table](#)

[Model 66 With Router](#)

[Download a Manual](#)

If you like this ... take a look at these:

[Powermatic Model 64A Tablesaw](#)

[Powermatic Model 72A Tablesaw/14" Tilting](#)

[Arbor Tablesaw](#)

[Powermatic Model 74A, 14" Tilting](#)

[Arbor/12" Scoring Saw](#)

- 2195063 Accu-fence, 30"
- 2250116 Blade guard and splitter assembly
- 2328001 Insert, table
- 2328002 Insert, dado
- 2389003 Special cast iron extension wing kit**
- 2402005 Accu-Fence, side panel replacement kit
- 2440020 Accu-Fence, rear-lock assembly (optional)
- 2471015 Mitre gauge
- 3104663 Motor cover (old style)
- 3104667 Motor cover (serial #95662522 & up)
- 3186008 Standard extension wing, 8" rounded
- 6080143 Blade, 35 tooth carbide tipped
- 6080144 Blade, 50 tooth carbide tipped
- 6080148 Blade, 40 tooth carbide tipped
- 6101004 Cabinet without Rout-R-Lift System (for 50" Accu-Fence System, black table only)
- 6253118 Sliding table, retrofit
- 6284600 Tenoning jig
- 6400010 Insert, zero clearance
- 6441000 Legs, set of two
- 6827028 Table board, 28" x 353/8"
- 6682004 Rout-R-Lift
- 6827031 Table board with hole for Rout-R-Lift, 28" x 353/8"
- 6827032 Table board with hole for Rout-R-Lift, 28" x 24"

Model:	66			
Blade Diameter (in):	10			
Arbor Diameter (in):	5/8			
Max. Depth of Cut (in):	3-1/8			
Max. Rip (Right of Blade/in):	50			
Max Rip (Left of Blade/in):	12			
Max. Cut Depth at 45 degrees (in):	2-1/8			
Table in Front of Saw, Blade at Max Cut (in):	12			
Max Width of Dado (in):	13/16			
Max. Dia. of Dado (in):	8			
Table Height (in):	34			
Table Size (w/ Standard Ext/WxL/in):	28 x 37-1/2			
Table Size (w/Special Ext/WxL/in):	28 x 63-1/2			
Table Size (w/o Ext/WxL/in):	28 x 21-1/2			
Overall Dimensions (WxDxH/in):	32 x 57-5/8 x 34			
Motor:	5 HP, 3 Ph, 209/230V, Prewired 208V			
	5 HP, 3 Ph, 460V			
	5 HP, 1 Ph, 230V or			
	3 HP, 1 Ph, 230V			
Shipping Weight (lbs):	600 approx.			
Stock Numbers	5 HP, 3 Ph, 208/230V	5 HP, 3 Ph, 460V	5 HP, 1 Ph, 230V	3 HP, 1 Ph, 230V
With:				

30" Accu-Fence System:	---	---	---	1660802*
50" Accu-Fence System:	1660750	1660807	1660791	1660760
50" Accu-Fence System* & Sliding Table:	1660793*	1660809*	1660795*	1660794
30" Accu-Fence System & Rout-R-Lift System:	---	---	---	1660806*
50" Accu-Fence System & Rout-R-Lift System:	1660804	1660810	1660805	1660803
50" Accu-Fence System & Special Cast Iron Extension Wings **:	1660770**	166080**	---	1660780**
50" Accu-Fence System & Cabinet/Table System:	---	---	1660813	1660811
50" Accu-Fence System, Cabinet/Table System & Rout-R-Lift System	---	---	1660814	1660812

[Home](#) - [Contact Us](#) - [Manuals](#) - [Dealers](#) - [Product Previews](#)

powermatic@wmhtoolgroup.com - 427 Sandford Road, LaVergne, TN 37086

QUICK JUMP:

POWERMATIC

Shaper

- Spindle assembly is mounted to the bottom of the table
- Extra large, heavy cast iron table with t-slot mitre gauge
- Two reversible spindle speeds (forward & reverse)
- Work piece hold-downs are fully adjustable
- Safe, easy cutter set up is assisted by a positive detent spindle lock
- Left and right fences are independently adjustable
- Dust collection port is built into the fence

Standard Equipment

- Motor with magnetic controls
- Reversing switch
- Adjustable fence with 4" dust collection port
- Mitre gauge
- Starting pin
- Work piece hold-downs
- 1/4" and 1/2" collet router bit adapters
- 1/2" , 3/4" and 1" spindle

Stock Number (3 HP, 1 Ph, 230V):	1791273
Stock Number (5 HP, 3 Ph, 230V):	1791274
Model:	25A
Spindle Speeds (RPM):	7500 & 10000
Reversing	
Table Size (W x D/in):	29-1/4 x 25-1/2
Table Opening Diameter (in):	6-3/16
Insert Opening Diameter (in):	3-1/4
Fence Size (in):	13-5/16 x 2-7/8
Spindle Size (in):	1/2, 3/4, 1
Under Nut (in):	1/2 x 3-1/2, 3/4 x 3-1/2, 1 x 3-1/2
Router Bit Collet Size (in):	1/4, 1/2
Spindle Travel (in):	3 3/4
Overall Dimensions (W x D x H/in)	25 x 29 x 37
Motor:	3 HP, 1 Ph, 230V or 5 HP, 3 Ph, 230V
Shipping Weight (lbs):	400



[Download a Manual](#)

If you like this ... take a look at these:

[Powermatic Model 27 Shaper](#)
[Powermatic Model 27S Shaper](#)
[Powermatic Model 28 Shaper](#)
[Powermatic Model 29 Shaper](#)

QUICK JUMP: **POWERMATIC****Powerfeeder**

- Universally adaptable to a variety of woodworking machines
- Uniform feed rates increases machine surface quality and reduces machining tear-out while greatly increasing productivity
- Soft, but tough rubber driving wheels are chain connected for continuous and consistent drive
- Four speeds
- Forward and Reverse
- Variable head positioning
- Single phase units feature a transmission with convenient shift lever

Standard Equipment

- Capacitor start motor
- Universal stand
- Mounting hardware
- Power cord
- Grease gun (lubrication)

Three Wheel Powerfeeders

Stock Number (1 HP, 3 Ph, 230V): 1790800

Stock Number (1 HP, 1 Ph, 115V): 1790807

Stock Number (1 HP, 3 Ph, 460V): 1790810

Four Wheel Powerfeeders

Stock Number (1 HP, 3 Ph, 230V): 1790811

Stock Number (1 HP, 1 Ph, 230V): 1790812

Max Dist Column to Wheels (in): 25

Max Vertical Adj (in): 9 1/2

Number of Wheels: 3 or 4


Feed Wheel Dia (in): 4 3/4

Feed Rates (FPM): 13, 26, 36 & 72

Shipping Weight (lbs)

Three Wheel: 141

Four Wheels: 152

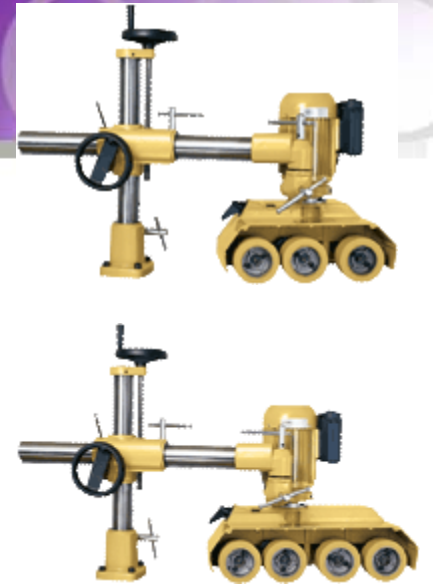



JET Air Filtration Systems

AFS-1000, 1000CFM Air Filtration System

AFS-1500, 1500 CFM Air Filtration System

AFS-2000, 2000 CFM Air Filtration System

JET Dust Collectors

NEW!

Canister Dust Collectors

Single Bag Dust Collector

Two Stage Dust Collector

Dust Collectors (3/4 HP - 3 HP)





JET Tablesaws



SuperSaw - JWSS-10

10" Right Tilting Arbor Tablesaw - JTAS-10X

10" Left Tilting Arbor Tablesaw - JTAS-10XL

10" Direct Drive Tablesaw - JTS-10DD

10" Contractor Style Tablesaw with Two Cast
Iron Wings - JWTS-10CW2-JF

10" Contractor-Style Table with Two Steel Wings
- JWTS-10JF

10" 1-3/4 HP Tilting Arbor Cabinet Tablesaw -
JWCS-10A-PF

12" Tilting Arbor Tablesaw





JET Shapers

1 HP Shaper - JWS-18HO

1-1/2 HP Shaper - JWS-22CS

2 HP Shaper - JWS-34L

3 HP Shaper - JWS-25CS





JET Sanders

Oscillating Spindle Sander - JOVS-10

Benchtop Spindle Sander - JBOS-5

Combination 6" x 48" Belt/12" Disc Sander -
JSG-6DC

Edge Horizontal/Vertical Sander - EHVS-80

Performax Sanders

Performax 110V Series Shop Pro 25 Drum
Sander

Performax 110V Series 16-32 Plus Drum Sander





QUICK JUMP: Go to ...



Performax Shop Pro 25

- Continuous-duty 1-1/2 HP motor, 110-120 volt power.
- 25" width capacity allows wide sanding in a single pass
- 3/32" per turn height adjustment. DepthGauge with locking stop included.
- Height adjustment handle makes radical height change quickly and minute changes for extremely precise sanding thickness control
- TensionRollers, zinc-plated steel infeed and outfeed rollers mount next to the drum. Height and downward pressure are adjustable
- Infinitely-variable feed rate from 0-10' per minute.
- Cast aluminum stand construction, zinc-plated steel with centerless ground column tubes
- Dust collection, 600 CFM minimum.
- Shipped assembled, some minor final assembly required
- Drum ball bearings are sealed and permanently lubricated

Standard Equipment

- One abrasive strip, 80 grit
- 100 grit abrasive conveyor belt
- Trackers
- TufTool
- 110 Volt Model
- 625002 ShopPro 25, 20 amp service required

Optional Accessories

- 60-0505 Abrasive CleaningStick
- 61-1002 Poly conveyor belt
- 98-0070 Rack'N Roll
- 98-0120 ProScale™ DRO
- 98-0130 CasterSet
- 98-2201 Infeed & Outfeed Tables
- Ready-to-Cut Abrasives - 36 to 220 grit
- Ready-to-Wrap Abrasives - 24 to 220 grit

Sanding Capacity:

Maximum Width (in):	25
Minimum Length (in):	2-1/2
Maximum Thickness (in):	4
Minimum Thickness (in):	1/32
Dimensions (HxWxD/in):	43 x 46 x 31
Drum (in): 1	5 x 25 extruded aluminum, 1600 RPM
Dust Hood:	PVC hood with 4" vacuum port, hinge at back
Bearings (in): 2	1
Conveyor Bed:	Precision flattened steel

JET, Powermatic, and Performax products are sold ONLY through distributors. Please see our [Dealer Search](#) for a location near you.

Wants some accessories? Try these:

[Universal Mobile Base, Heavy-Duty](#)

[Universal Mobile Base, Industrial-Duty](#)

[Air-Flex Cotton Wheels Buffing/Sanding Machines](#)
[Buffing and Polishing Compound Set](#)
[Emery Compound \(Coarse\)](#)
[Finishing Rouge \(Fine\)](#)
[Loose Cotton Muslin Wheels](#)
[Multi-Purpose Lubrication Wax](#)
[Spiral Sewn Cotton Wheels](#)
[Spiral Sewn Sisal Wheels](#)
[Tripoli Compound \(Medium\)](#)

[Aluminum-Oxide Hard Sleeves, 5-1/2" Long](#)
[Aluminum-Oxide Hard Sleeves, 9" Long](#)
[Aluminum-Oxide Hard Sleeves, 6" Long](#)
[Aluminum-Oxide Soft Sanding Sleeves, 3" x 6"](#)
[Aluminum-Oxide Soft Sanding Sleeves, 4" x 6"](#)
[Aluminum-Oxide Soft Sanding Sleeves, 6" x 6"](#)
[Aluminum-Oxide Sanding Belts -](#)

Conveyor Bed:	1 Precision matched steel conveyor bed reinforced with four steel cross sections
Conveyor Motor:	43 in. -lb torque, direct drive D.C. motor, Infinitely variable 0-10 feet per minute
Drive Motor (TEFC):	1-1/2 HP, 3450 RPM; 110-120V, 60 Hz; continuous-duty
Shipping Weight (lbs):	275

[Home](#) - [Contact Us](#) - [Manuals](#) - [Dealers](#) - [Catalogs](#) - [Product Previews](#)

jet@wmhtoolgroup.com - P.O. Box 1937, Auburn WA 98071-1937

[Aluminum Oxide Sanding Belts - Open Coat, 6" x 89"](#)
[Aluminum-Oxide Sanding Belts - Closed Coat, 6" x 89"](#)
[Aluminum-Oxide Sanding Belts - Open Coat, 1" x 42"](#)
[Aluminum-Oxide Sanding Belts - Open Coat, 6" x 48"](#)
[Aluminum-Oxide Sanding Belts - Closed Coat, 6" x 48"](#)
[Aluminum-Oxide Ready-To-Wrap Strips - Performax 16-32](#)
[Aluminum-Oxide Ready-To-Wrap Strips - Performax 22-44](#)
[Aluminum-Oxide Ready-To-Wrap strips - Performax ShopPro 25](#)
[Buffing and Sanding Arbor](#)
[JET Stik](#)
[Flap Sanding Wheels](#)
[Pneumatic Drums, 6" Long](#)
[PSA Sanding Discs, 8" Aluminum-Oxide](#)
[PSA Sanding Discs, 9" Aluminum-Oxide](#)
[PSA Sanding Discs, 12" Aluminum-Oxide](#)
[Sanding Blocks](#)
[Sanding Drum Set, 28-Piece](#)
[Sanding Sleeve Sets, 24-Piece](#)
[Sanding Drum and Sleeves, 3" x 3"](#)
[Sanding Drum and Sleeves, 1/2" x 2"](#)
[Sanding Drum and Sleeves, 3/4" x 2"](#)
[Sanding Drum and Sleeves, 1" x 2"](#)
[Sanding Drum and Sleeves, 1-1/2" x 2"](#)



JET Planers

12-1/2" Wood Planer - JWP-12DX

13" Planer/Molder Combination Machine - JPM-

13 and JPM-13CS

15" Wood Planer - JWP-15CS





JET Lathes

Mini-Lathe - JML-1014

Woodworking Lathe - JWL-1236



14" x 42" Lathe - JWL-1442



16" x 42" Lathe - JWL-1642

Lathe Accessories





JET Jointers

6" Open Stand Jointer - JJ-6OS

6" Closed Stand Jointer - JJ-6CSX

8" Closed Stand Jointer - JJ-8CS




 QUICK JUMP:


JDP-14J Pictured

JET, Powermatic, and Performax products are sold ONLY through distributors. Please see our [Dealer Search](#) for a location near you.

Floor Mount Drill Presses

- Hinged metal belt and pulley cover coupled with quick adjustment motor mount allows rapid changing of spindle speeds
- Rotating, +45 degrees tilting, crank-operated worktable with quick-release clamp
- On/Off switch located on front of the drill press head for safety
- A 1/2" diameter external positive depth stop with dual nut locking feature for quick adjustment (JDP-17FSE features a clutch type drill stop)
- Adjustable tension spindle return spring
- Spindle is supported by high quality ball bearings
- Built-in worklight on all models except JDP-17FSE; bulb not included
- Drill chuck and key included

Stock Number:	354167	354168	354169	354170
Model:	JDP-14JF	JDP-14MF	JDP-17MF	JDP-20MF
Swing (in):	14	14	16-1/2	20-1/2
Drilling Capacity (in):	1/2	5/8	5/8	1
Chuck Size (in):	1/2	5/8	5/8	3/4
Spindle Travel (in):	3-3/8	3-1/4	4-3/8	4-5/8
Spindle Distance to Base (in):	49	49	49	46-3/4
Spindle Distance to Table (max/in):	29-1/8	29-1/8	29-1/8	29-1/8
Table Size (dia/in):	12-1/4	12-3/4	13-3/4	18-5/8 x 16-1/8
Spindle Taper:	JT-33	MT-2	MT-2	MT-3
Column Diameter (in):	2-7/8	3-1/8	3-1/8	3-3/8
Number of Spindle Speeds:	5	16	16	12
Range of Spindle Speeds (RPM):	460 - 2,470	200 - 3,630	200 - 3,630	150 - 4,200
Base Size (in):	10-5/8 x 18	11-1/8 x 19-5/8	11-1/8 x 19-5/8	13-5/8 x 22-3/8
Motor:	1/2 HP, 1 Ph 115/230V Prewired 115V	3/4 HP, 1 Ph 115/230V Prewired 115V	3/4 HP, 1 Ph 115/230V Prewired 115V	1-1/2 HP, 1 Ph 115/230V Prewired 115V

Want some accessories? Try these:

[Auger Bit Sets](#)
[Bi-Metal Hose, 10-Piece](#)
[Brad Point Drill Bit Set, 7-Piece Carbide-Tipped](#)
[Brad Point Drill Bit Set, 25-Piece TiN Coated](#)
[Depth Stop Set, 7-Piece Split Ring Drill Bit Set, 22-Piece Tapered Drill Bit Sets, Cobalt](#)
[Drill Bit Sets, High Speed Steel](#)
[Drill Bit Sets, High Speed Steel TiN Coated](#)
[Drill Bit Sets, HSS Brad Point Forstner Bit Sets](#)
[Forstner Bit Sets, TiN Coated Plug Cutting Set, 8-Piece](#)

[Universal Mobile Base, Heavy-Duty](#)

[Universal Mobile Base, Industrial-Duty](#)

[Fast Clamp](#)
[FastTrak Drill Press Table and Fence](#)
[Half Track Rail Systems](#)
[Mini Tracks](#)
[Mitre Gauge, Deluxe](#)
[Mitre Gauge, Deluxe with JET Pro Stop Add-On Systems](#)
[Pro Stop](#)



JET Bandsaws



16", 18" & 20" Bandsaws - JWBS-16,
JWBS-18 & JWBS-20
12" Open Stand Bandsaw - JWBS-12OS
14" Bandsaws - JWBS-14OS, JWBS-14CS,
JWBS-14MW

